


hMOR Single and Dual DC-DC Converters

15 TO 50 VOLT INPUT - UP TO 120 WATT

FEATURES

- Parallel operation with current share, up to 5 units (540 watts)
- Output flexibility, trim of 80% to 110%
- Operating temperature -55 °C to +125 °C
- Input voltage 15 to 50 V
- Fully isolated, magnetic feedback
- Fixed high frequency switching
- Remote sense on single output models
- Inhibit function
- Sync In and Sync Out
- Indefinite short circuit protection
- High power density with up to 87% efficiency
- Soft-start function limits inrush current during start-up

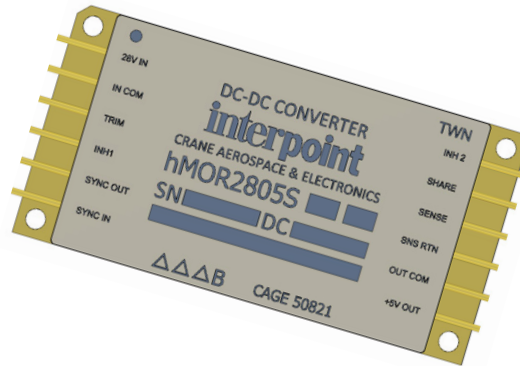

MODELS	
OUTPUT VOLTAGE (V)	
SINGLE	DUAL
3.3	±5
5	±6.3
6.3	±9.5
9.5	±12
12	±15
15	

DESCRIPTION

The Interpoint® hMOR Series™ of DC-DC converters offers up to 120 watts of power in a low profile package with a 15 to 50 volt input. The hMOR converters are manufactured in our fully certified and qualified MIL-PRF-38534 Class H production facility and packaged in hermetically sealed steel cases. They are ideal for use in programs requiring high reliability, small size, and high efficiency. Full operation over the military temperature range, -55 °C to +125 °C, makes the hMOR Series an ideal choice for military, aerospace, space, and other high reliability applications. Use Interpoint FMCE-1528 EMI filter to meet the requirements of MIL-STD-461C CE03 and MIL-STD-461D, E and F CE102 levels of conducted emissions.

The converters are offered with standard screening, “ES” screening, or fully compliant to “883” MIL-PRF-38534 Class H screening.

The hMOR Series converters incorporate a single-ended forward topology which uses a constant frequency Pulse Width Modulator (PWM) current mode control design and switches at 550 kHz, nominal.

SPAN VOLTAGE

The dual models can be used as a single output voltage by connecting the load between positive and negative outputs, leaving the common unconnected resulting in double the output voltage. For example, hMOR2815D can be used as a 30 volt output. When using a dual to double the output voltage (span voltage) the maximum load capacitance across the span voltage is half that specified for each output.

SHORT CIRCUIT PROTECTION

The converters also provide short circuit protection by restricting the current to 125% of the full load output current, typical.

INHIBIT FUNCTION

All models offer two inhibits, one referenced to input common and one referenced sense return (single output models) or to output common (dual output models). A remote sense function is available on single output models.

TRIM FUNCTION

Using the trim function, the hMOR Series can provide any output 80 -110% of the nominal voltage. For example, trimming the two 15 volt outputs of the 15 dual (hMOR2815D) to 14 volts, and then spanning the outputs will provide a 28 volt output.

hMOR Single and Dual DC-DC Converters

15 TO 50 VOLT INPUT - UP TO 120 WATT

HOW TO USE THE FUNCTIONS

INPUT VOLTAGE

Steady state voltage range is 15 to 50 V. Transient range is 50 to 80 V for a maximum of 120 msec. All models include a soft-start function to prevent large current draw and minimize overshoot.

EMI INPUT FILTERS

Internal 500 volt capacitors (dielectric working voltage (DWV) 700 volts) are connected between the case and input common and between the case and output common.

Use Interpoint FMCE-1528 EMI filter to meet the requirements of MIL-STD-461C CE03 and MIL-STD-461D, E and F CE102 and CS101. When using an external input filter it is important that the case of the filter and the case of the converter be connected through as low an impedance as possible. Direct connection of the baseplates to chassis ground is the best connection. If connected by a single trace, the trace should be as wide as it is long. See Figure 1.

On dual models the positive output is regulated and the negative output is transformer coupled (cross-regulated) to the positive output. When trimming the duals, both output voltages will be adjusted equally. See Figure 3.

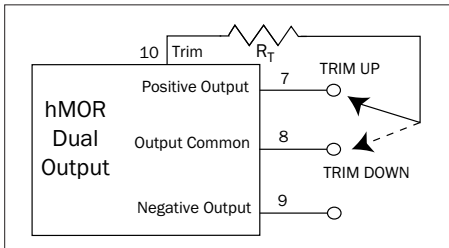


FIGURE 3: TRIM - DUAL

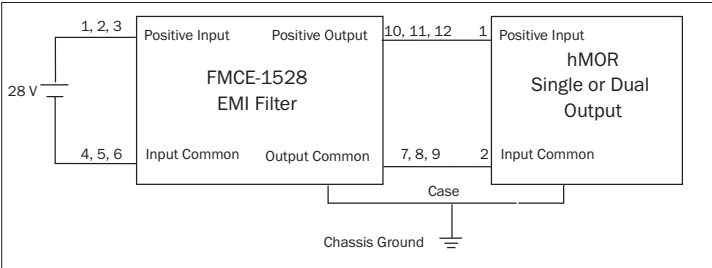


FIGURE 1: EXTERNAL FILTER CONNECTION

TRIM

Both single and dual output models include a trim function. Output voltage can be trimmed from 80% up to 110% of nominal V_{out} . When trimming up, do not exceed the maximum output power. When trimming down, do not exceed the maximum output current. See Figure 2.

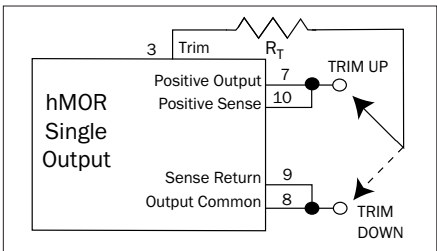


FIGURE 2: TRIM - SINGLE

hMOR Single and Dual DC-DC Converters

15 TO 50 VOLT INPUT - UP TO 120 WATT

INHIBIT 1 AND 2

Two inhibit terminals disable switching, resulting in no output and very low quiescent input current. The two inhibit pins allow access to an inhibit function on either side of the isolation barrier to help maintain isolation.

An open collector is required for interfacing with both of the inhibit pins. Pulling either inhibit pin low will inhibit the converter. Leaving the pins open will enable the converter. Inhibit 1 is referenced to Input Common. Inhibit 2 is referenced to Sense Return for single output models and to Output Common for dual output models.

The open circuit voltage (unit enabled) for Inhibit 1 is 19 V and for Inhibit 2 it is up to 4.9 V. Leave the Inhibit pins unconnected if not used. The required active low voltage level is 0.8 V maximum for Inhibit 1 and 0.2 V maximum for Inhibit 2.

UNDERVOLTAGE LOCKOUT

Undervoltage lockout prevents the units from operating below approximately 14.5 volts input voltage to keep system current levels smooth, especially during initialization or re-start operations.

SYNC IN AND SYNC OUT

The hMOR converters can be synchronized to the system clock by applying an active high sync signal to the Sync In pin. Sync Out can be used to synchronize other components to the hMOR converter's switching frequency.

The frequency range for external synchronization is 450 to 550 kHz. The requirements for an external signal are 20% to 50% duty cycle, $0 \leq L \leq 0.8 \text{ V}$ and $4.5 \leq H \leq 9 \text{ V}$. Both Sync In and Sync Out are referenced to input common. Sync In should be connected to input common if not used.

POSITIVE OUTPUT, NEGATIVE OUTPUT AND OUTPUT COMMON

Output current is typically limited to 125% of maximum specified current under short circuit or load fault conditions.

Single output models operate from no load to full load.

hMOR Single and Dual DC-DC Converters

15 TO 50 VOLT INPUT - UP TO 120 WATT

PARALLELING (SHARE PIN)

By using the Share pin, up to five single or dual converters may be paralleled for a total output power of up to 540 watts, depending on model. To calculate available power, multiply the number of converters (up to five) by their maximum output power. Multiply the result by 90% for total available power. See Figure 8 for the internal circuit. The converters will share within 10% of each other at 25% to 90% for total available power.

All Positive Outputs and Positive Senses should be connected to a common point. All Negative Outputs and Sense Returns should be connected to a common point. The Share pin is referenced to Sense Return. Leave the share pin floating (unconnected) if not used. Also see Figure 4.

POSITIVE SENSE AND SENSE RETURN

A special remote sensing feature maintains the desired output voltage at the load. See Figure 4. When this feature is not used, connect the sense lines to their respective output terminals. See Figure 5. Remote sensing is available on single output models only. Do not exceed 110% of Vout and do not exceed maximum output power.

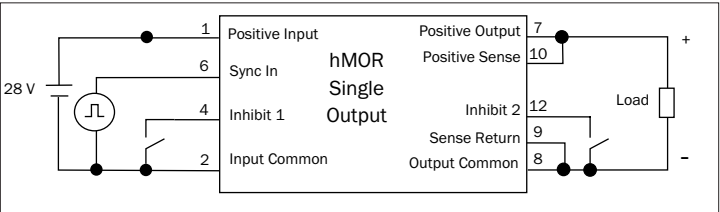


FIGURE 5: TYPICAL CONNECTIONS

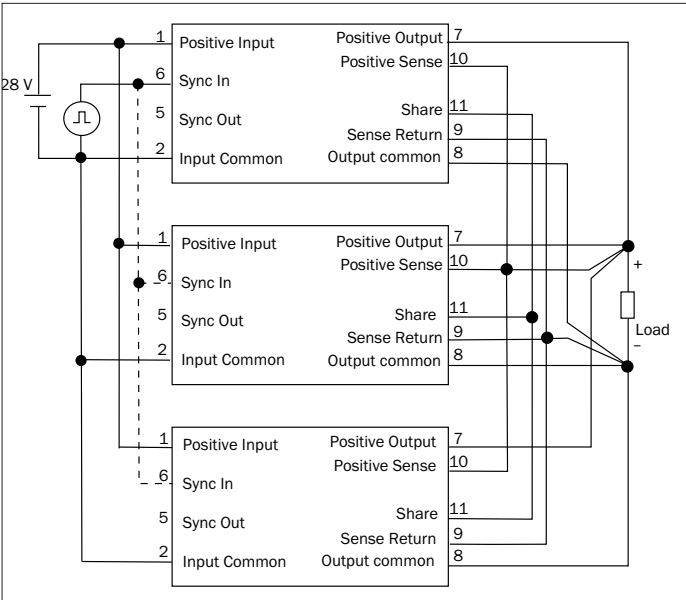


FIGURE 4: PARALLELING

hMOR Single and Dual DC-DC Converters

15 TO 50 VOLT INPUT - UP TO 120 WATT

PIN OUT		
Pin	Single Output	Dual Output
1	Positive Input	Positive Input
2	Input Common	Input Common
3	Trim	Case
4	Inhibit 1 (INH1)	Inhibit 1 (INH1)
5	Sync Out	Sync Out
6	Sync In	Sync In
7	Positive Output	Positive Output
8	Output Common	Output Common
9	Sense Return	Negative Output
10	Positive Sense	Trim
11	Share	Share
12	Inhibit 2 (INH2)	Inhibit 2 (INH2)

TABLE 1: PIN OUT

PINS NOT IN USE	
Case	User's discretion
Inhibit (INH1, INH2)	Leave unconnected
Sense Lines	Must be connected to the appropriate outputs
Sync In	Connect to input common
Sync Out	Leave unconnected
Share	Leave unconnected
Trim	Leave unconnected

TABLE 2: PINS NOT IN USE

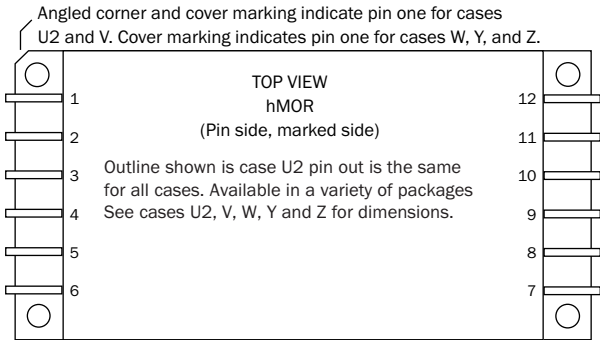


FIGURE 6: PIN OUT TOP VIEW

hMOR Single and Dual DC-DC Converters

15 TO 50 VOLT INPUT - UP TO 120 WATT

CASES: SMD AND VENDOR SIMILAR PART NUMBERS	
STANDARD MICROCIRCUIT DRAWING (SMD)	hMOR SIMILAR PART
X	STANDARD CASE (U2)
U	V
T	W
Z	Z

1. See page 7 and Table for details

TABLE 3: SMD CROSS REFERENCE FOR CASE OPTIONS

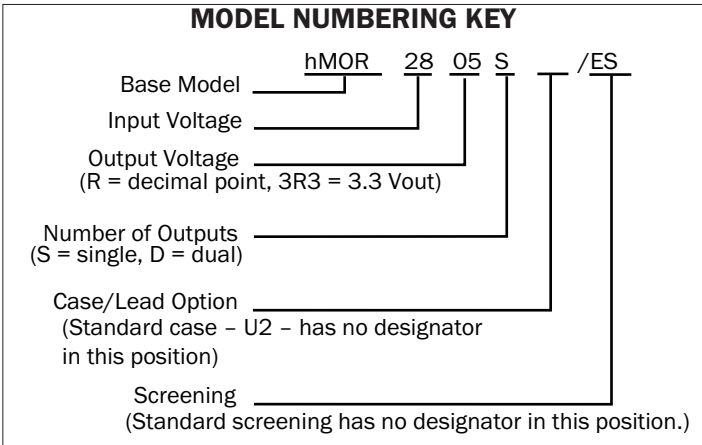


Figure 7: Model Numbering Key

MODEL NUMBER OPTIONS						
TO DETERMINE THE MODEL NUMBER ENTER ONE OPTION FROM EACH CATEGORY IN THE FORM BELOW.						
CATEGORY	Base Model and Input Voltage	Output Voltage ¹	Number of Outputs ²	Case Options ³	Screening ⁴	Pin Seal
OPTIONS	hMOR28	05	S	(U2, leave blank) V, W, Y, Z	(standard screening ⁴) ES 883	(standard seal ⁵)
FILL IN FOR MODEL # ⁸	hMOR28	_____	_____	_____	/ _____	_____

Notes

1. Number of Outputs: S is a single output
2. Case Options: For the standard case, U2, leave the case option blank. For other case options, insert the letter that corresponds to the desired case. See Figure 18 through Figure 22 for case designators and dimensions.
3. Screening: For standard screening leave the screening option blank. For other screening options, insert the desired screening level. For more information see Table 6 on page 16.
4. For "standard" screening leave blank.
5. For "standard" seal, compression glass, leave blank.
6. If ordering by model number add suffix "-Q" to request solder dipped leads (hMOR2805S/883-Q).

TABLE 4: Model Number Options

hMOR Single and Dual DC-DC Converters

15 TO 50 VOLT INPUT - UP TO 120 WATT

TABLE 4: OPERATING CONDITIONS, ALL MODELS, 25 °C CASE, 28 VIN, 100% LOAD, UNLESS OTHERWISE SPECIFIED

PARAMETER	CONDITIONS	ALL MODELS			UNITS
		MIN	TYP	MAX	
LEAD SOLDERING TEMPERATURE ¹	10 SECONDS MAX.	—	—	300	°C
STORAGE TEMPERATURE ¹		-65	—	+150	°C
CASE OPERATING TEMPERATURE	FULL POWER	-55	—	+125	°C
	ABSOLUTE ¹	-55	—	+135	
DERATING OUTPUT POWER/CURRENT ¹	LINEARLY	From 100% at 125 °C to 0% at 135 °C			
ISOLATION: INPUT TO OUTPUT, INPUT TO CASE, OUTPUT TO CASE ²	@ 500 V AT 25 °C	100	—	—	Megohms
UNDER VOLTAGE LOCKOUT		—	14.5	—	V
CURRENT LIMIT/POWER LIMIT ³	% OF FULL LOAD	—	125	—	%
AUDIO REJECTION ¹		—	40	—	dB
SWITCHING FREQUENCY		450	500	550	kHz
SYNCHRONIZATION	INPUT FREQUENCY	450	—	550	kHz
	DUTY CYCLE ¹	20	—	50	%
	ACTIVE LOW	—	—	0.8	V
	ACTIVE HIGH ¹	4.5	—	9	
	SYNC IN REFERENCED TO	INPUT COMMON			
	SYNC OUT REFERENCED TO	INPUT COMMON			
INHIBIT ACTIVE LOW (OUTPUT DISABLED) Do not apply a voltage to the inhibit pin. ⁴	INHIBIT 1 PIN PULLED LOW	—	—	0.8	V
	INHIBIT 1 PIN SOURCE CURRENT ¹	—	—	1	mA
	INHIBIT 1 REFERENCED TO	INPUT COMMON			
	INHIBIT 2 PIN PULLED LOW	—	—	0.2	V
	INHIBIT 2 PIN SOURCE CURRENT ¹	—	—	2	mA
	INHIBIT 2 SINGLES REFERENCED TO	SENSE RETURN			
	INHIBIT 2 DUALS REFERENCED TO	OUTPUT COMMON			
INHIBIT ACTIVE HIGH (OUTPUT ENABLED) Do not apply a voltage to the inhibit pin. ⁴	INHIBIT PIN CONDITION	OPEN COLLECTOR OR UNCONNECTED			
	OPEN INHIBIT 1 PIN VOLTAGE ¹	—	17	—	V
	OPEN INHIBIT 2 PIN VOLTAGE ¹		4.9	5.5	

For mean time between failures (MTBF) contact Applications Engineering at powerapps@craneae.com

Notes

- Guaranteed by characterization test and/or analysis. Not a production test.
- Isolation is tested with the all input pins (referenced to input common) tied together, and all output pins (referenced to output common) tied together. They are tested for isolation input to output, input to case and output to case. Discharge the pins after each test.
- Current limit is defined as the point at which the output voltage drops by 1%
Dual outputs: The over-current limit will trigger when the sum of the currents from both outputs reaches 125% (typical value) of the maximum rated "total" current of both outputs.
- An external inhibit interface should be used to pull the inhibits low or leave them floating. The inhibit pins can be left unconnected if not used.

hMOR Single and Dual DC-DC Converters

15 TO 50 VOLT INPUT - UP TO 120 WATT

TABLE 5: ELECTRICAL CHARACTERISTICS -55 °C TO +125 °C CASE, 28 VIN, 100% LOAD, UNLESS OTHERWISE SPECIFIED

SINGLE OUTPUT MODELS		MOR2805S			UNITS
PARAMETER	CONDITIONS	MIN	TYP	MAX	
OUTPUT VOLTAGE		4.87	5.00	5.13	V
OUTPUT CURRENT	V _{IN} = 16 TO 40	0	—	20	A
OUTPUT POWER	V _{IN} = 16 TO 40	0	—	100	W
OUTPUT RIPPLE	25 °C	—	—	70	mV p-p
10 kHz - 20 MHz	-55 °C TO +125 °C	—	30	80	
LINE REGULATION	V _{IN} = 16 TO 40	—	0	20	mV
LOAD REGULATION	NO LOAD TO FULL	—	0	30	mV
INPUT VOLTAGE	CONTINUOUS	15	28	50	V
	TRANSIENT 120 ms ¹	—	—	80	
INPUT CURRENT	NO LOAD	—	70	150	mA
	INHIBITED-INH1	—	—	10	
	INHIBITED-INH2	—	—	70	
INPUT RIPPLE CURRENT	10 kHz - 20 MHz	—	50	130	mA p-p
EFFICIENCY	25 °C	78	—	—	%
	-55 °C TO +125 °C	77	81	—	
LOAD FAULT ^{2, 3}	SHORT CIRCUIT	—	—	35	W
POWER DISSIPATION	RECOVERY ¹	—	—	10	ms
STEP LOAD RESPONSE ^{3, 4}	TRANSIENT	—	—	±250	mV pk
	RECOVERY	—	—	450	µs
STEP LINE RESPONSE ^{1, 3, 5}	TRANSIENT	—	—	±400	mV pk
	RECOVERY	—	—	300	µs
V _{IN} = 16 TO 40					
START-UP ^{3, 6}	DELAY	—	—	10	ms
	OVERSHOOT ¹	—	0	50	mV pk
CAPACITIVE LOAD ^{1, 7}	T _C = 25 °C	—	—	3500	µF

Notes


1. Guaranteed by characterization test and/or analysis. Not a production test.
2. Short circuit is measured with a 10 milliohm (±10%) resistive load.
3. Recovery and start-up times are measured from application of the transient or change in condition to the point at which V_{OUT} is within 1% of final value.

4. Step load test is performed at 10 microseconds typical.
5. Step line test is performed at 100 microseconds ± 20 microseconds.
6. Tested on release from inhibit.
7. No effect on dc performance.


hMOR Single and Dual DC-DC Converters

15 TO 50 VOLT INPUT - UP TO 120 WATT


TYPICAL PERFORMANCE PLOTS: 25 °C CASE, 28 VIN, 100% LOAD, UNLESS OTHERWISE SPECIFIED.
THESE ARE EXAMPLES FOR REFERENCE ONLY AND ARE NOT GUARANTEED SPECIFICATIONS.

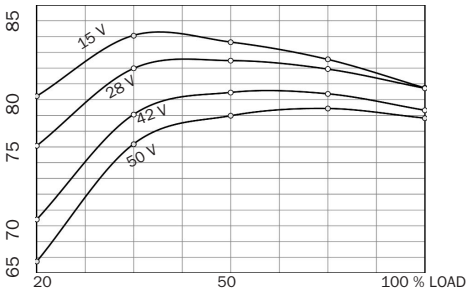


hMOR 2805S Efficiency
FIGURE 8

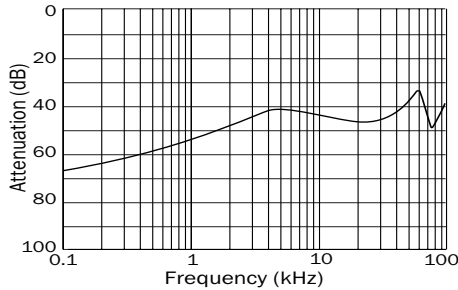


hMOR2805S Audio Rejection
FIGURE 10

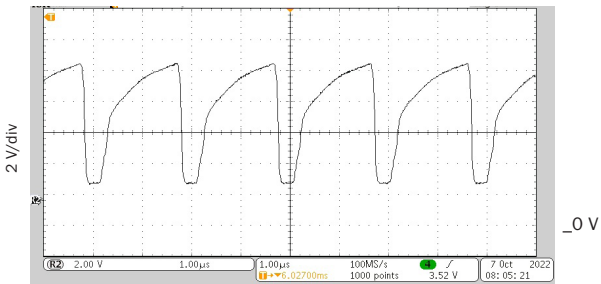


1 μs/div
Sync Out Representative of all Models
FIGURE 9

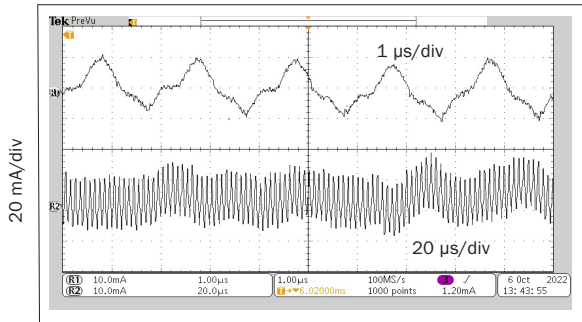

hMOR2805S Input Ripple Current (Iin)
FIGURE 11

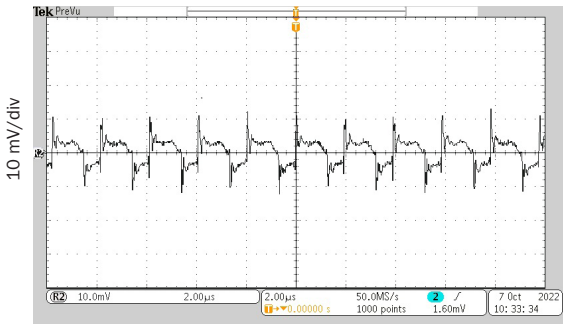

2 μs/div
hMOR 2805S Output Ripple (Vout)
FIGURE 12

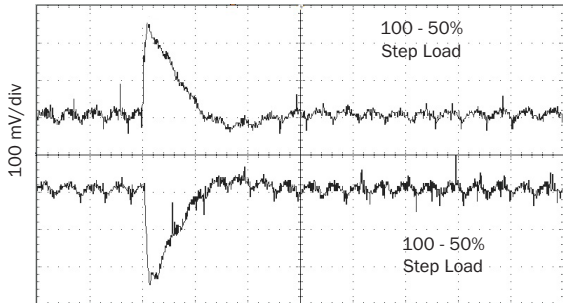


100 μs/div
hMOR 2805S STEP LOAD RESPONSE
FIGURE 13

hMOR Single and Dual DC-DC Converters


15 TO 50 VOLT INPUT - UP TO 120 WATT

TYPICAL PERFORMANCE PLOTS: 25 °C CASE, 28 VIN, 100% LOAD, UNLESS OTHERWISE SPECIFIED.
THESE ARE EXAMPLES FOR REFERENCE ONLY AND ARE NOT GUARANTEED SPECIFICATIONS.

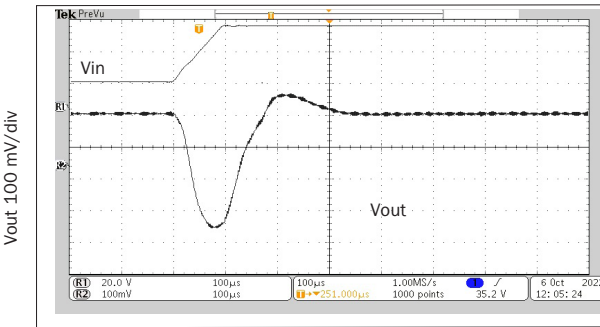


1 μs/div
15 to 50 V
hMOR2805S STEP LINE RESPONSE

FIGURE 14

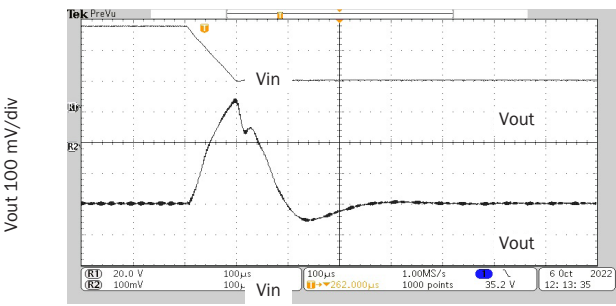


1 ms/div
50 to 15 V
hMOR2805S STEP LINE RESPONSE

FIGURE 17

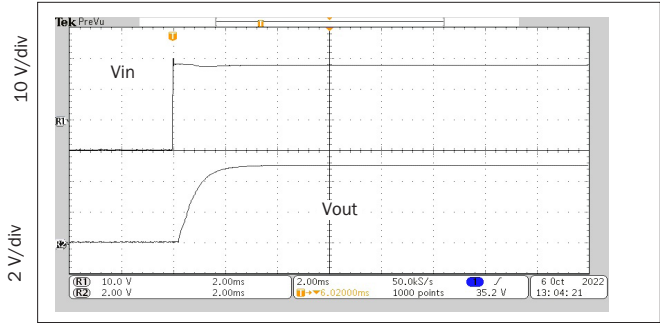

2 ms/div
All combinations of line and load
hMOR2805S START-UP RESPONSE

FIGURE 15

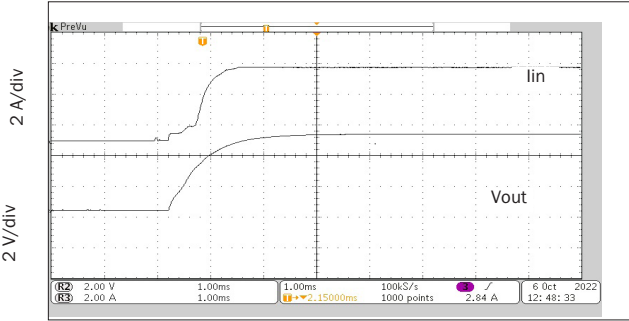

1 ms/div
hMOR2805S INHIBIT RELEASE INRUSH CURRENT


FIGURE 16

hMOR Single and Dual DC-DC Converters

15 TO 50 VOLT INPUT - UP TO 120 WATT

TOP VIEW CASE U2
Flanged case, short leads

Case "U2" does not require a designator in the Case Option position of the model number for the MOR+ family

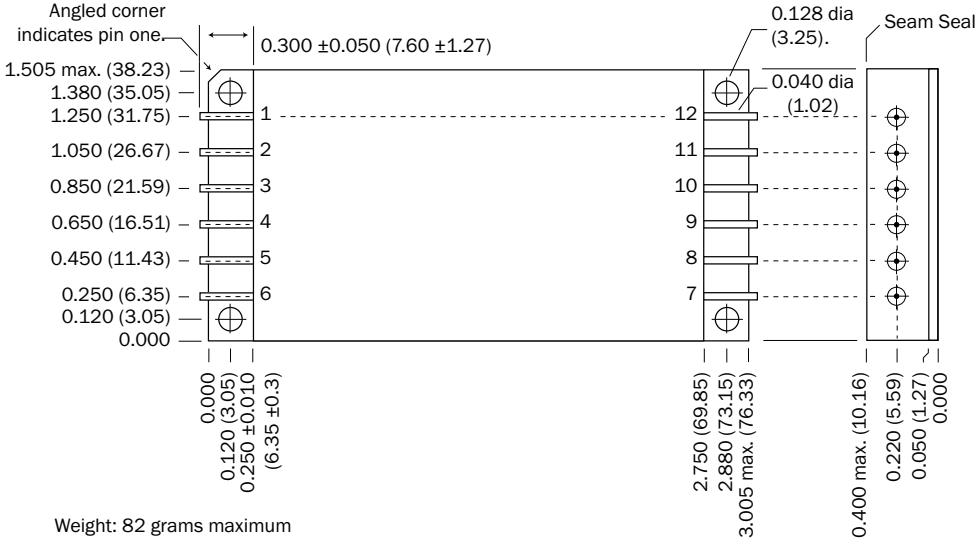

Case dimensions in inches (mm)
Tolerance ± 0.005 (0.13) for three decimal places
 ± 0.01 (0.3) for two decimal places
unless otherwise specified

CAUTION
Heat from reflow or wave soldering may damage the device. Solder pins individually with heat application not exceeding 300°C for 10 seconds per pin.

Materials
Header Cold Rolled Steel/Nickel/Gold
Cover Kovar/Nickel
Pins OFHC copper/gold, compression glass seal
Gold plating of 50 - 150 microinches is included in pin diameter
Seal Hole: 0.120 ± 0.002 (3.05 ± 0.05)

Please refer to the numerical dimensions for accuracy.


FIGURE 5: CASE U2

hMOR Single and Dual DC-DC Converters

15 TO 50 VOLT INPUT - UP TO 120 WATT

TOP VIEW CASE V
Flanged case, down leaded

Case "V" requires a "V" in the Case Option position of the model number.

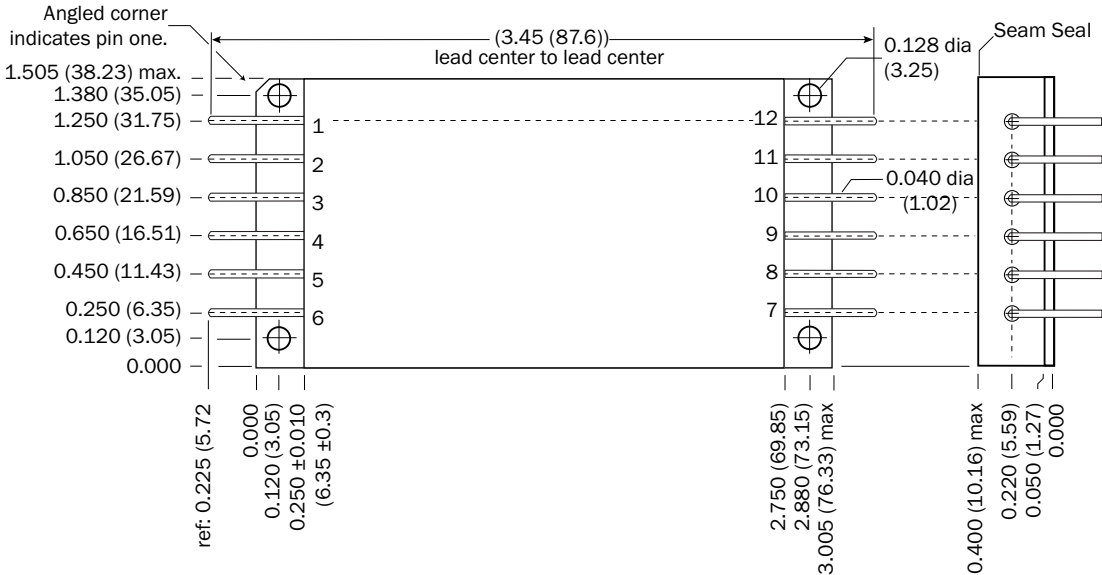

Weight: 84 grams maximum

Case dimensions in inches (mm)
Tolerance ± 0.005 (0.13) for three decimal places
 ± 0.01 (0.3) for two decimal places
unless otherwise specified

CAUTION
Heat from reflow or wave soldering may damage the device. Solder pins individually with heat application not exceeding 300°C for 10 seconds per pin.

- Materials**
- Header Cold Rolled Steel/Nickel/Gold
 - Cover Kovar/Nickel
 - Pins OFHC copper/gold, compression glass seal
 - Gold plating of 50 - 150 microinches is included in pin diameter
 - Seal Hole: 0.120 ± 0.002 (3.05 ± 0.05)

Please refer to the numerical dimensions for accuracy.

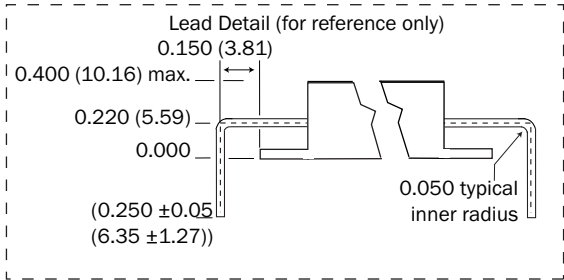



FIGURE 6: CASE V

hMOR Single and Dual DC-DC Converters

15 TO 50 VOLT INPUT - UP TO 120 WATT

TOP VIEW CASE W
Tabbed case, up-leaded

Case "W" requires a "W" in the Case Option position of the model number.

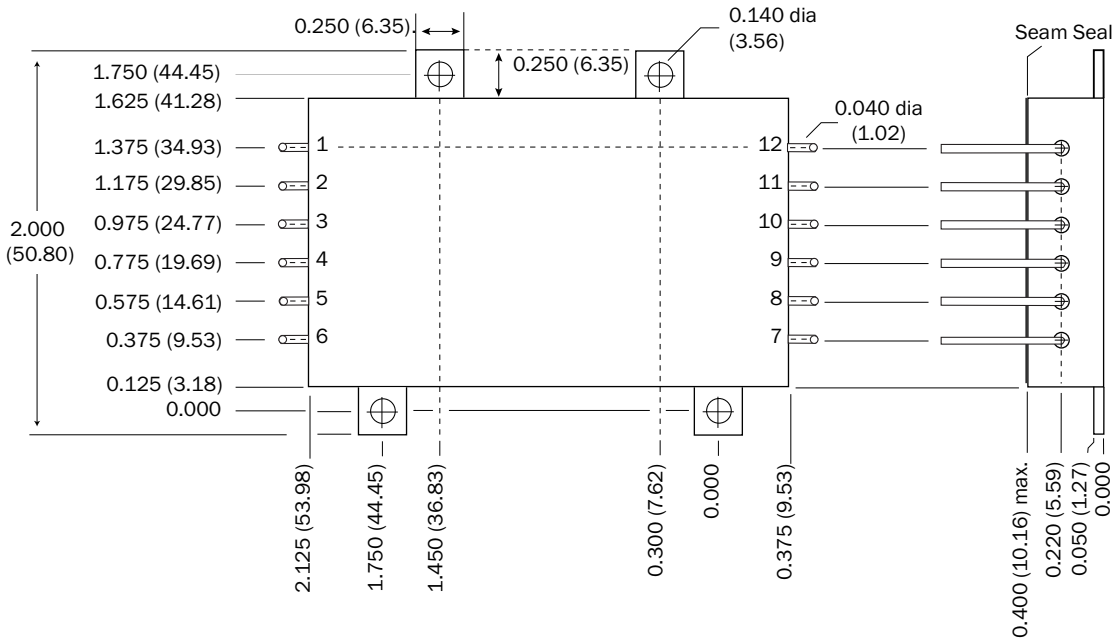


Weight: 79 grams maximum

Case dimensions in inches (mm)
Tolerance ± 0.005 (0.13) for three decimal places
 ± 0.01 (0.3) for two decimal places
unless otherwise specified

CAUTION
Heat from reflow or wave soldering may damage the device. Solder pins individually with heat application not exceeding 300°C for 10 seconds per pin.

Materials
Header Cold Rolled Steel/Nickel/Gold
Cover Kovar/Nickel
Pins OFHC copper/gold, compression glass seal
Case "M" (Case W with -MOD, see table 5):
Aluminum alloy with copper, ceramic seal.
Gold plating of 50 - 150 microinches
Included in pin diameter
Seal Hole: 0.120 ± 0.002 (3.05 ± 0.05)

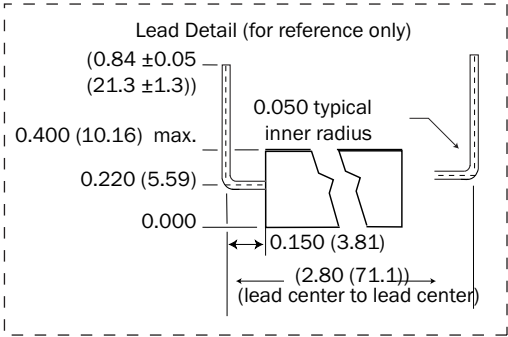

Please refer to the numerical dimensions for accuracy.


FIGURE 7: CASE W

hMOR Single and Dual DC-DC Converters

15 TO 50 VOLT INPUT - UP TO 120 WATT

TOP VIEW CASE Y
Tabbed case, straight-leaded

Case "Y" requires a "Y" in the Case Option position of the model number.

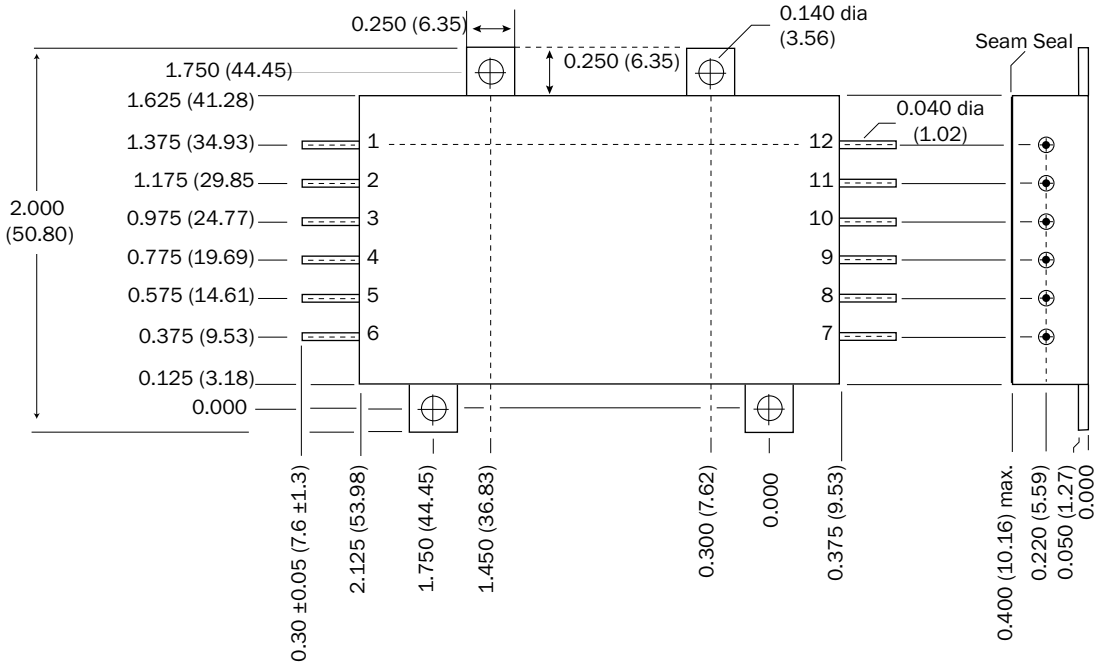

Weight: 79 grams maximum

Case dimensions in inches (mm)
Tolerance ± 0.005 (0.13) for three decimal places
 ± 0.01 (0.3) for two decimal places
unless otherwise specified

CAUTION
Heat from reflow or wave soldering may damage the device. Solder pins individually with heat application not exceeding 300°C for 10 seconds per pin.

- Materials**
- Header Cold Rolled Steel/Nickel/Gold
 - Cover Kovar/Nickel
 - Pins OFHC copper/gold, compression glass seal
Gold plating of 50 - 150 microinches
Included in pin diameter
 - Seal Hole: 0.120 ± 0.002 (3.05 \pm 0.05)

Please refer to the numerical dimensions for accuracy.

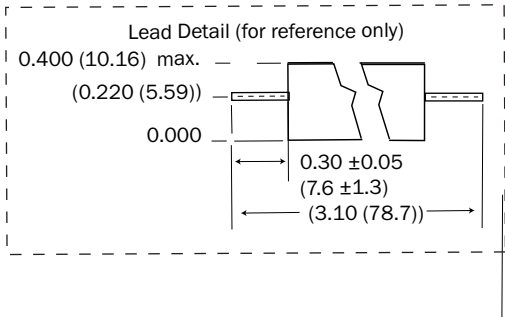



FIGURE 8: CASE Y

hMOR Single and Dual DC-DC Converters

15 TO 50 VOLT INPUT - UP TO 120 WATT

TOP VIEW CASE Z
Tabbed case, down-led

Case "Z" requires a "Z" in the Case Option position of the model number.

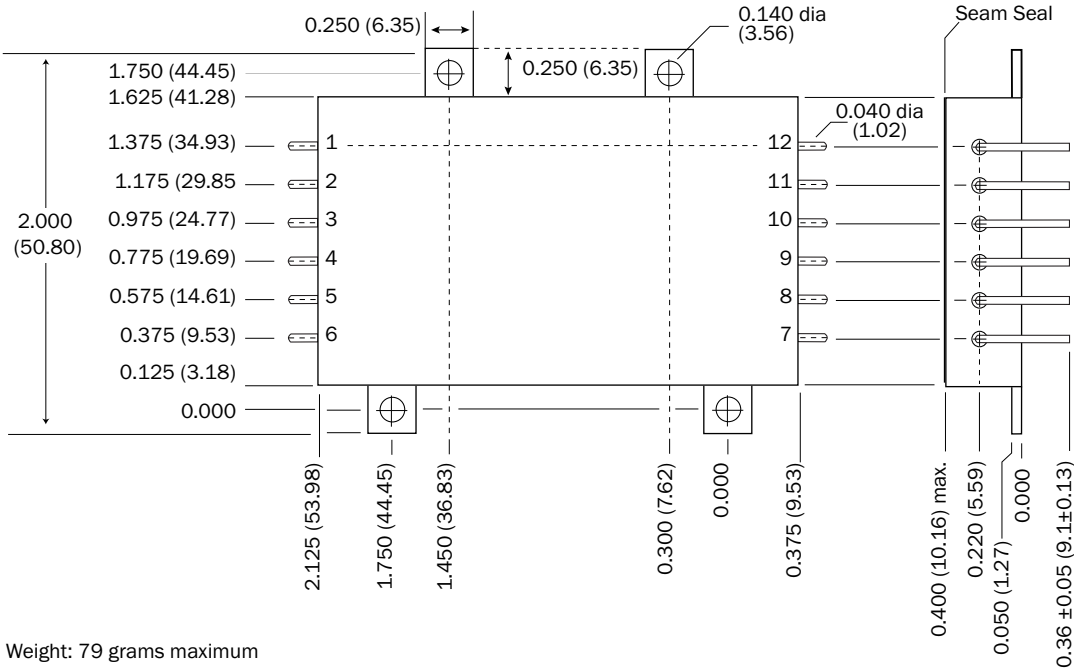


Weight: 79 grams maximum

Case dimensions in inches (mm)
Tolerance ± 0.005 (0.13) for three decimal places
 ± 0.01 (0.3) for two decimal places
unless otherwise specified

CAUTION
Heat from reflow or wave soldering may damage the device.
Solder pins individually with heat application not exceeding 300 °C for 10 seconds per pin.

Materials
Header Cold Rolled Steel/Nickel/Gold
Cover Kovar/Nickel
Pins OFHC copper/gold, compression glass seal
Gold plating of 50 - 150 microinches
Included in pin diameter
Seal Hole: 0.120 ± 0.002 (3.05 ± 0.05)

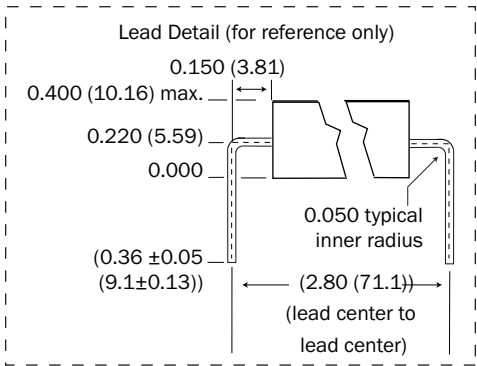

Please refer to the numerical dimensions for accuracy.

FIGURE 9: CASE Z

hMOR Single and Dual DC-DC Converters

15 TO 50 VOLT INPUT - UP TO 120 WATT

ELEMENT EVALUATION TABLES FOR QML PRODUCTS ARE IN "APP-009 QUALITY AND CERTIFICATION", APPENDIX A, IN COMPLIANCE WITH MIL-PRF-38534 REVISION L.
(LINK [HTTPS://WWW.CRANEAE.COM/QUALITY-ASSURANCE-MODULAR-POWER](https://www.craneae.com/quality-assurance-modular-power))

ENVIRONMENTAL SCREENING HIGH RELIABILITY STANDARD, /ES, /SX AND /883 (CLASS H)

TEST PERFORMED	NON-QML ¹			CLASS H QML ^{2, 3}
	STANDARD	/ES	/SX ⁴	/883
Pre-cap Inspection, Method 2017, 2032	■	■	■	■
Temperature Cycle (10 times)				
Method 1010, Cond. C, -65°C to +150°C, ambient			■	■
Method 1010, Cond. B, -55°C to +125°C, ambient		■		
Constant Acceleration				
Method 2001, 3000 g			■	■
Method 2001, 500 g		■		
PIND, Test Method 2020, Cond. A			■ ⁵	■ ⁵
Burn-in Method 1015, +125°C case, typical ⁶				
96 hours		■		
160 hours			■	■
Final Electrical Test, MIL-PRF-38534, Group A,				
Subgroups 1 through 6, -55°C, +25°C, +125°C case			■	■
Subgroups 1 and 4, +25°C case	■	■		
Hermeticity Test, Method 1014				
Gross Leak, Cond. C ₁ , fluorocarbon		■	■	■
Fine Leak, Cond. A ₂ , helium		■	■	■
Gross Leak, Dip	■			
Final visual inspection, Method 2009	■	■	■	■

Test methods are referenced to MIL-STD-883 as determined by MIL-PRF-38534.

Notes

1. Non-QML products may not meet all of the requirements of MIL-PRF-38534.
2. All processes are QML qualified and performed by certified operators.
3. A QML products which has an SMD number is marked "QML". A QML product which does not have an SMD number is marked per MIL-PRF-38534 table III.

TABLE 6: ENVIRONMENTAL SCREENING HIGH RELIABILITY DC-DC CONVERTERS AND EMI FILTERS STANDARD, /ES AND /883 (CLASS H)